




Adaptiv Mini Fitting & User Guide

ADVM-GM1
MyLink, Intellilink & CUE 8" System

WWW.ADAPTIV-MULTIMEDIA.COM

Adaptiv Mini

Adaptiv Mini allows HDMI & Camera input to the OEM screen.



This plug and play Mini interface adds HDMI to connect your Apple or Android device, allowing you to mirror your smartphone display on the vehicle's original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

GM Vehicles with MyLink, Intellilink & CUE 8" system.
(Cadillac, Chevrolet, GMC, Holden, Opel & Vauxhall)

Kit Includes

Adaptiv Interface
Vehicle Harness


Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Connects2 cannot be held responsible for the installation of this product.

Technical Support


Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.

Please use our dedicated online technical support centre: support.connects2.com

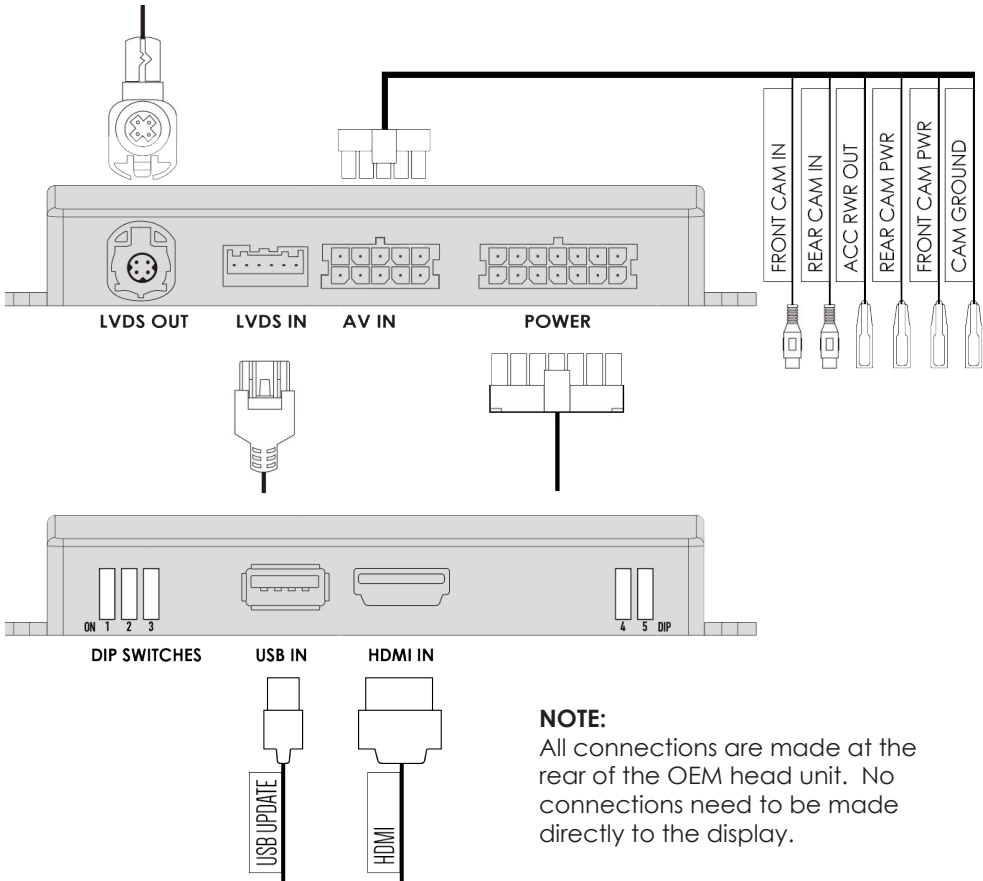


NOTE:
All connections are made at the rear of the OEM head unit. No connections need to be made directly to the display.


DIP SWITCH SETTINGS




DIP 1
If the vehicle has OEM reverse camera
(ON: YES OFF: NO)



DIP 3
If the vehicle has after-market reverse camera (ON: YES OFF: NO)




DIP 2
If the vehicle has after-market front camera (ON: YES OFF:NO)




DIP 4
OFF
DIP 5
OFF

Button Configuration

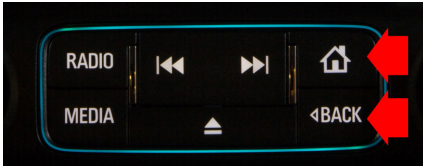

HDMI Access

Select Aux In from the OEM source menu.
Hold **HOME KEY** Button for 2 seconds to switch between OEM screen and Adaptiv Mini HDMI screen.

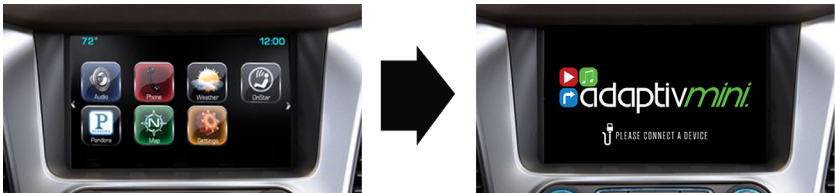


Video In Motion Warning - 10 MPH

Press top right corner of touch screen to disable the video in motion warning message

Rear and Front Camera Access

From either HDMI mode or OEM mode

1. Select reverse gear for reverse camera
2. Deselect reverse gear - will go to after market front camera (if DIP 2 ON)
Press top right corner of screen to cancel front camera or drive over 10 MPH

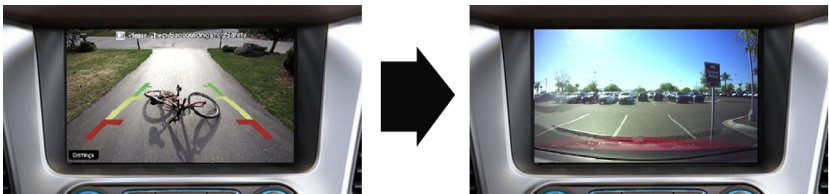

Front Camera Access

Press **BACK** button for two seconds or alternatively press **top right corner of touch screen** to enter the front camera screen (if DIP 2 is ON)

View Version Number

Hold **HOME KEY** Button for 8 seconds to enter firmware information screen. Touch top right of touchscreen to exit.